


Plan View

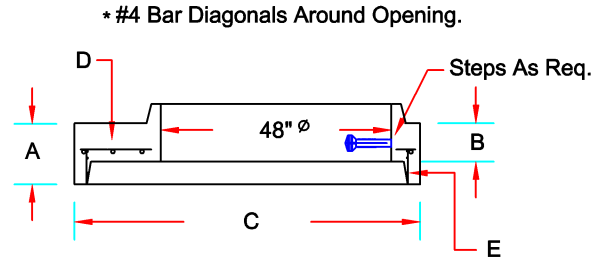

Section View A. - A.

		60" Dia. Flat Top Reducer	72" Dia. Flat Top Reducer	84" Dia. Flat Top Reducer
A	Overall Thickness	12-3/4"	13"	13"
B	Slab Thickness	8"	8"	8"
C	Outside Diameter	72"	86"	100"
D	Rebar	#4 Bar @6"O.C.E.W.	#4 Bar @6"O.C.E.W.	#4 Bar @6"O.C.E.W.
E	Wire In Walls	.277 Wire @4-3/4"O.C.	.277 Wire @3-3/4"O.C.	.277 Wire @3-1/4"O.C.
	Weight W/Grate	2400#	3700#	5300#

Notes:

1. Concrete 4,000 P.S.I.
2. Constructed As Per ASTM C-478.
3. Steps Meet ASTM C-478.
4. Butyl Joints Meet ASTM C-990.
5. All Rebar Meets ASTM A-615, Grade 60.
6. Reinforcing Wire Meets ASTM A-82.

Type of Coating: _____ Interior ___ Exterior ___.